

Why Melasty

3111

LONG LINER

Uzun Meme Lastiği (IGA)
Сосковая резина (IGA)



3111 Long Liner (IGA); due to the design and structure of bellows, convenient folding is provided and during the attachment of system to nipples vacuum loss is prevented. Provides ease of use.

3111 Uzun Meme Lastiği (IGA) ‘nın tasarımındaki körükli yapı sayesinde rahat katlanması sağlanmakta ve sağım başlığının memeye tutturulması esnasında sistemde vakum kaybı yaşanmamaktadır. Ve kullanım kolaylığı sağlamaktadır.

3111 Сосковая резина (IGA) из-за дизайна и сильфонной структуры обеспечивается удобная складывание и во время крепления системы к соскам предотвращается потеря вакуума. И обеспечивает простоту использования.



3111 Long Liner (IGA); designed after determining the deficiencies on the other liners as a result of R & D activities by **Melasty** engineers, design owned by **Melasty**.


3111 Uzun Meme Lastiği (IGA) **Melasty** mühendisleri tarafından ar-ge çalışmaları sonucu diğer meme lastiklerindeki eksikler tespit edilerek dizayn edilmiş tasarımlı **Melasty**’e ait olan üründür.

3111 Сосковая резина (IGA) разработан после определения недостатков других сосковых резин в результате R & D деятельности инженерами **Melasty**, дизайн принадлежит **Melasty**.

The neural stimulation effect that is created by the nipple and breast massage, causes the secretion of hormone; Oxytocin. Oxytocin hormone starts to milking and facilitating milking through the bloodstream, after stimulation of nipples. Secretion of the Oxytocin hormone lasts for **5 to 7 minutes**. Milking must be completed within this period.

3111 Long Liner (IGA) ergonomically shaped and was developed for high-yielding cattle. Wider size of claw connections with liner (**Ø 14 mm.**) allows milk reaches claw from nipple immediately (faster). This feature is especially important for highly efficient milking animals. Otherwise, the remaining milk in Teatcup will go back at high speed (**70 km/hour**) back to the breast and crashes to nipple to damage. This is to prevent damage **Melasty** as a result of their R & D activities. **Melasty** engineers have designed 3111 IGA to prevent damage as a result of their R & D activities.

3111-IGA

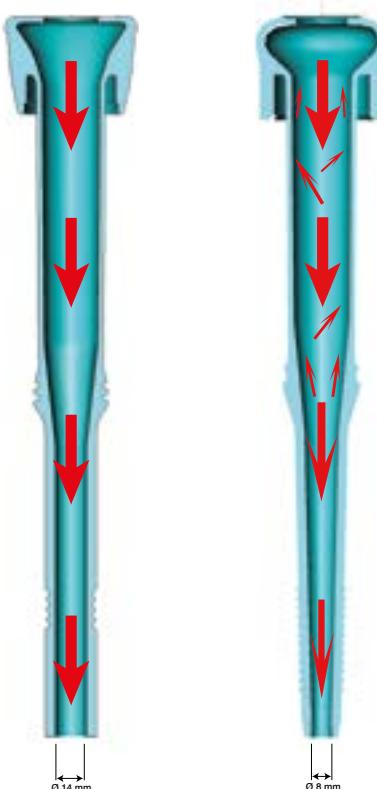

Meme başına ve memeye yapılan masajın yarattığı direkt sinirsel etki, oksitosin hormonunun salgılanmasını sağlar. Oksitosin hormonu kan yoluyla memeye ulaşıp sütün indirilmesi işlemini sağlar. Oksitosin salgılanması **5-7 dakika** sürer. Bu süre içerisinde sağının tamamlanması gereklidir.


3111 Uzun Meme Lastiği (IGA) Yüksek verimli inekler için geliştirilmiş; ergonomik yapılı meme lastiğidir. Memelik lastiklerinin pençe ile bağlantısının geniş olması (**Ø 14 mm.**), sağlanan sütün derhal (hızla) meme başından pençeye ulaşmasını sağlar. Bu özellik, özellikle yüksek verimli hayvanların sağımı açısından önemlidir. Aksi takdirde, kadeh içinde kalan süt büyük bir hızla (**70 km/saat hızı**) memeye geri çarpar ve memeye zarar verir. Bu zararı engellemek için **Melasty** mühendisleri yaptıkları ar-ge çalışmaları sonucunda 3111 İGA'yı tasarlamışlardır.

Массаж сосков и вымени обеспечивает прямое влияние нейронных секреций гормона окситоцина. Окситоцин является гормоном, через кровь достигает сосков и осуществляется процесс доения . Окситоцин секреция длится от **5 до 7** минут. Доение должно быть завершено в течение этого периода.

В доильных аппаратах Melasty выходы используемой сосковой резины разработано как **Ø14мм**. Широкая соединение сосковой резины с коллектором обеспечивает быстрый доступ молока из соска в коллектор. Это особенно важно в доении высокоэффективных животных. В противном случае оставшийся молоко с большой скоростью (**70 км/час**) врезается обратно в соски и повреждает их. Чтобы предотвратить такое повреждение инженеры **Melasty** в результате своей R&D деятельности спроектировали 3111 IGA.

Old

New

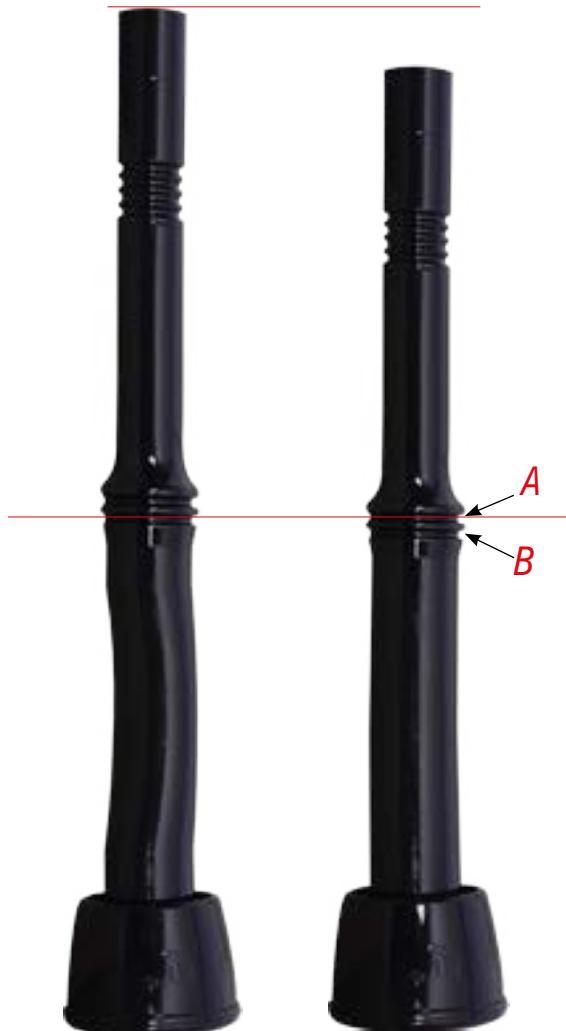

Eski Meme Lastiği

Yeni Meme Lastiği

Lactic acid in the milk, hot or cold water used during the washing cycle, weather conditions, ozone in the environment and repeated movement during milking, causes the liners deformed (elongation) before expected expiration period. And this causes a reduction of strain within the teatcup shell.

On 3111 IGA Liners; as a result of R & D carried out by **Melasty**, insertion part of liner has been upgraded to two stages to bring the performance level increased again by taking from section (level) **A** to section (level) **B**, when the deformation occurs.

Sağım esnasında kullanılan meme lastiklerinde, sütteki laktik asit, yıkama esnasında kullanılan sıcak ve soğuk su, dış hava koşulları, ortamda bulunan ozon ve meme lastığının sağım esnasında yapmış olduğu tekrarlanan mekanik haraket, meme lastığının kullanım süresi dolmadan deformasyona uğramasına (uzamasına) yol açmaktadır. Ve memelik kılıfının içersindeki gerginliğin azalmasına sebep olmaktadır.

3111 İGA Meme lastiği ise, **Melasty** tarafından yapılan arge sonucu kılıfın takıldığı kısım, iki kademeyle çıkarılarak, deformasyon meydana geldiğinde meme lastiği **A** kademesinden **B** kademesine getirilerek kılıf içersindeki gerginlik eski haline getirilerek performansı tekrar yükseltilmektedir.

Во время доения используемая сосковая резина; молочная кислота в молоке, используемая во время промывки горячая и холодная вода, внешние погодные условия, озон в окружающей среде и повторяющие механические движения сосковой резины во время доения вызывают деформации сосковой резины до истечения срока использования. Эта деформация приводит к снижению напряженности в корпусе доильного стакана.

В сосковой резине 3111 IGA, часть оболочки отделена двумя делениями и при деформации подтянув сосковую резину на стакан с **A** до **B** деления напряжение внутри оболочки повышается и производительность увеличивается снова.

7050

MILKING CLAW (Complete) 240cc

240cc- Komple Melasty Pençe

Коллектор 240cc (Комплект)

As a result of R & D carried out by **Melasty**, on 7050 Complete Claw, the diameter of Milk-inlet nipples increased to **18,5mm** to have the milk easily from liner, also the Milk-outlet tube has been expanded to **21mm** so after closing the claw, milk transition made more comfortable. Thus, milking time was shortened.

Due to the vacuum fluctuations, milk gets back in to the nipples, this causes the biggest reason for udder diseases. On 7050 Complete Claw the capacity has been increased to **240cc** to prevent this by reducing the fluctuations while milking.

Melasty tarafından yapılan arge sonucunda, üretilen 7050 Komple Melasty Pençe'de sütün pençeye giriş yaptığı ayakların çapı **18,5mm** ye çıkarılarak sütün meme lastiğinden rahat bir şekilde alınması sağlanmış, pençe kapağında ise, sütün süt hortumuna çıkış yaptığı kısım **21mm** ye genişletilerek sütün pençeden rahat bir şekilde geçisi sağlanmıştır. Böylece sağım süresi kısaltılmıştır.

Vakum dalgalarının sebebiyle memeden çıkan süt tekrar memeye geri girmekte ve meme hastalıklarının en büyük sebebi olmaktadır. 7050 Komple Melasty Pençe'de ise pençe hacmi **240cc** ye çıkarılarak sağım esnasında meydana gelen vakum dalgaları azaltılarak bu engellenmektedir.

В результате проведённой **Melasty** R&D деятельности, произведённый 7050 Коллектор (Комплект) вход молока в коллектор увеличен до **18,5мм** для получения с легкостью молока из сосковой резины, а выход молока из коллектора в молочный шланг расширен до **21мм** для комфортного прохождения через коллектор. Таким образом, время доения сведено к минимуму.

Из-за колебаний вакуума выходящая из сосков молоко попадает обратно и является основной причиной заболеваний вымени. А в 7050 Коллектор (Комплект) объём увеличенный до **240cc** уменьшает колебаний во время доения и препятствует этому.



3442

SINGLE MILK TUBES

Tekli Süt Hortumu

Молочный шланг

As a result of R & D carried out by **Melasty**, on 3422 Single Milk Hose, Milk-outlet tube OD x ID designed as **Ø25mm** by **Ø16mm**, Internal Diameter has been expanded for a more convenient transition

During the hot weather conditions, hose adhesion after softening while milk flow, has been prevented with the wall thickness of **4.5 mm** and internal diameter **Ø16mm**.

Melasty tarafından yapılan arge sonucunda, üretilen 3422 Tekli Süt Hortumu **Ø25mm x Ø16mm** olarak tasarlanmış tekli süt hortumlarının iç çapı genişletilerek sütün pençeden süt güğümüne geçişini rahatlatılmıştır.

İç çapı **Ø16mm** et kalınlığı ise **4,5mm** olarak yapıldığında sıcak havalarda süt geçişini birlikte hortumun yumuşayarak yapışması engellenmiştir.

В результате проведенной Melasty R&D деятельности, созданный 3422 Молочный шланг разработан увеличенным внутренним диаметром **Ø25мм x Ø16мм** для более удобного прохода молока из коллектора в доильное ведро.

Когда произведено с внутренним диаметром **Ø16мм** и толщиною **4,5мм** предотвращено смягчаясь прилипанию шланга при прохождении молока в жаркую погоду.

7003

TUBE CLIP

Melasty Hortum Kelepçesi

Зажим шланга





3271

TWIN PULSE TUBES

Nabız Hortumu

Вакуумный шланг

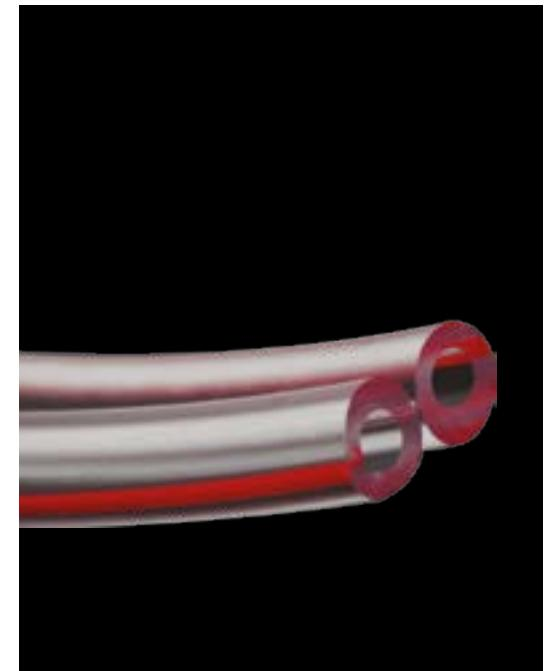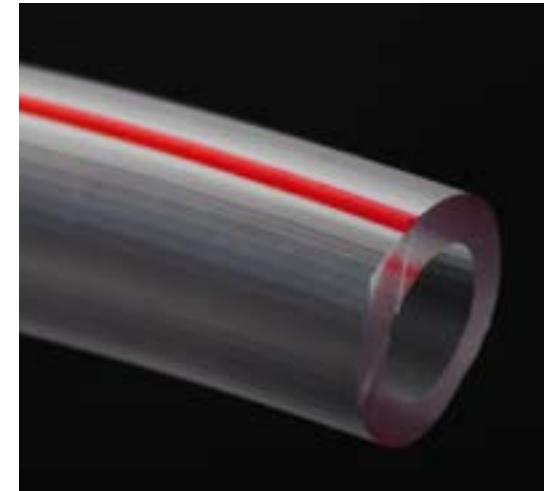

As a result of R & D carried out by **Melasty**, 7003 Melasty Hose Clamp produced by soft material, to prevent the clamp deforming the single milk tubes and pulse tubes. Due to its monolithic structure, it is prevented from falling during use.

Melasty tarafından yapılan arge sonucunda, üretilen 7003 Melasty Hortum Kelepçesi yumuşak malzemeden üretilerek kelepçenin, tekli süt hortumu ve nabız hortumunun formunun bozması, yekpare yapısı sayesinde zaman içerisinde kullanım esnasında hortumlardan düşmesi engellenmiştir.

В результате проведенной **Melasty** R&D деятельности, созданный 7003 Зажим шланга Melasty изготовлено из мягкого материала . Благодаря мягкой структуры зажима предотвращено нарушение формы молочного и вакуумного шланга. С течением времени во время использования, благодаря монолитной структуре исключена возможность падения.



During the manufacture of **Melasty** Milking Machine Chassis, the vacuum line is provided in a closed circulating system, thus, vacuum line has been isolated from corrosion may occur on chassis (rust, decay, holes may occur on chassis) by use of time. 5mm sheet was used in connection with air tank and chassis and the vibration resulting sound has been blocked, thus more solid and strong structure was redesigned.

Melasty süt sağma makinesinin şasesinin imalatında vakum hattının kapalı bir sistemle dolaştırılması sağlanmış, zaman içerisinde şase üzerinde meydana gelebilecek olan korozyondan (paslanma, çürüme, şasede meydana gelebilecek delikler) vakum hattı izole edilmiştir. Hava tankının şase ile bağlantısında 5mm lik sac kullanılarak vibrasyonla oluşabilecek ses engellenmiş, ve sağlam bir yapıya kavuşturulmuştur.

В производстве шасси доильного аппарата **Melasty**, вакуумный трубопровод обеспечивается замкнутой системой для циркуляции, таким образом вакуумный трубопровод изолирован от возникающих с течением времени коррозий (ржавчины, гниения, отверстий которые могут произойти на шасси). Вакуумная система, установлена на шасси с использованием металлической пластины толщиной 5мм, было достигнута прочная конструкция и вибрации на шасси сведены к минимуму.




7005

VACUUM DISTRIBUTOR

Melasty Vakum Distribütörü

Вакуумный распределитель Melasty

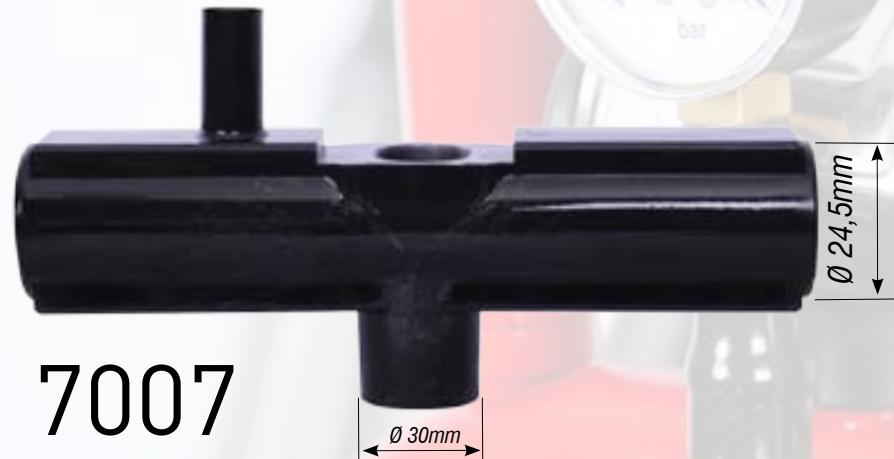


7007

¾ 20MM HOSE FITTINGS

¾ 20mm Erkek Hortum Rekoru

¾ 20мм Штуцер

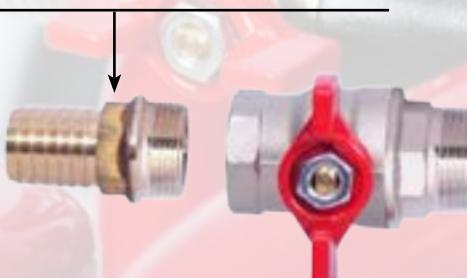

Due to vacuum tank outlet is smaller and air partition was made in narrow diameters, decrease in volumetric flow rate was discovered as a result of R & D carried out by Melasty. This problem was reduced with development of Melasty 7005 Vacuum Distributor with Inlet Ø30mm – outlet Ø24, 5mm and air tank vacuum outlet was upgraded to Ø32mm, thus makes machine breathes more comfortable.

Melasty tarafından yapılan arge sonucunda, üretilen süt sağım makinelerinde pompa tarafından üretilen vakum, vakum tankının çıkışının küçük olması ve hava taksimatının dar çaplarda yapılmasıyla makine debisinde büyük ölçüde düşüş saptanmıştır. Bu sorun, Melasty tarafından geliştirilen 7005 Vakum Distribütörü'nde giriş Ø30mm – çıkış Ø24,5mm ve hava tankının vakum çıkışı (Ø32mm) yükseltilerek makinanın rahat nefes alması sağlanmıştır.

В результате R&D деятельности, осуществляемой Melasty был обнаружен значительное снижение скорости потока воздуха в случае малого входа, выхода вакуумного бака аппарата и узкого диаметра вакуумный распределителя. Эта проблема, решена за счет увеличения 7005 Вакуумный распределителя вход Ø30мм – выход Ø24,5мм разработанным Melasty и обновлением выхода вакуумного бака (Ø32мм)

7006

¾ BUTTERFLY HANDLE BALL VALVES

¾ Kelebek Küresel Vana

¾ Шаровой Кран Бабочка





	DOUBLE MILKING MACHINES FOR COWS	
	<i>İkili Sağım Makinesi (Büyükbaş)</i>	14-15
	DOUBLE MILKING MACHINES FOR COWS (GASOLINE ENGINE)	
	<i>Benzinli İkili Sağım Makinesi (Büyükbaş)</i>	16-17
	DOUBLE MILKING MACHINES FOR COWS (TWIN BUCKET)	
	<i>İkili Sağım Makinesi Çift Güyümlü (Büyükbaş)</i>	18-19
	DOUBLE MILKING MACHINES FOR GOATS	
	<i>İkili Sağım Makinesi (Keçi)</i>	20-21
	DOUBLE MILKING MACHINES FOR GOATS (GASOLINE ENGINE)	
	<i>Benzinli İkili Sağım Makinesi (Keçi)</i>	22-23
	DOUBLE MILKING MACHINES FOR GOATS (TWIN BUCKET)	
	<i>İkili Sağım Makinesi Çift Güyümlü (Keçi)</i>	24-25
	DOUBLE MILKING MACHINES FOR SHEEPS	
	<i>İkili Sağım Makinesi (Koyun)</i>	26-27
	DOUBLE MILKING MACHINES FOR SHEEPS (GASOLINE ENGINE)	
	<i>Benzinli İkili Sağım Makinesi (Koyun)</i>	28-29
	DOUBLE MILKING MACHINES FOR SHEEPS (TWIN BUCKET)	
	<i>İkili Sağım Makinesi Çift Güyümlü (Koyun)</i>	30-31
	SINGLE MILKING MACHINES FOR COWS	
	<i>Tekli Sağım Makinesi (Büyükbaş)</i>	32-33
	SINGLE MILKING MACHINES FOR COWS (GASOLINE ENGINE)	
	<i>Benzinli Tekli Sağım Makinesi (Büyükbaş)</i>	34-35
	SINGLE MILKING MACHINES FOR COWS (JUNIOR)	
	<i>Tekli Sağım Makinesi (Büyükbaş)</i>	36-37
	SINGLE MILKING MACHINES FOR COWS (ECOMINI)	
	<i>Tekli Sağım Makinesi (Büyükbaş)</i>	38-39
	SINGLE MILKING MACHINES FOR COWS (COMPACT)	
	<i>Tekli Sağım Makinesi (Büyükbaş)</i>	40-41

	SINGLE MILKING MACHINES FOR GOATS	
	Tekli Sağım Makinesi (Keçi)	42-43
	SINGLE MILKING MACHINES FOR GOATS (GASOLINE ENGINE)	
	Benzinli Tekli Sağım Makinesi (Keçi)	44-45
	SINGLE MILKING MACHINES FOR GOATS (JUNIOR)	
	Tekli Sağım Makinesi (Keçi)	46-47
	SINGLE MILKING MACHINES FOR GOATS (ECOMINI)	
	Tekli Sağım Makinesi (Keçi)	48-49
	SINGLE MILKING MACHINES FOR GOATS (COMPACT)	
	Tekli Sağım Makinesi (Keçi)	50-51
	SINGLE MILKING MACHINES FOR SHEEPS	
	Tekli Sağım Makinesi (Koyun)	52-53
	SINGLE MILKING MACHINES FOR SHEEPS(GASOLINE ENGINE)	
	Benzinli Tekli Sağım Makinesi (Koyun)	54-55
	SINGLE MILKING MACHINES FOR SHEEPS (JUNIOR)	
	Tekli Sağım Makinesi (Koyun)	56-57
	SINGLE MILKING MACHINES FOR SHEEPS (ECOMINI)	
	Tekli Sağım Makinesi (Koyun)	58-59
	SINGLE MILKING MACHINES FOR SHEEPS (COMPACT)	
	Tekli Sağım Makinesi (Koyun)	60-61
	MILK BUCKET UNIT FOR COWS	
	Süt Gügüm Ünitesi (Büyükbaş)	62
	FIXED SYSTEM VACUUM PUMP	
	Sabit Sistem Vakum Pompası	63
	FIXED SYSTEM & SINGLE MILK BUCKET UNIT	
	Tek Gügüm Üniteli Sabit Sistem (Büyükbaş)	64-67
	FIXED SYSTEM BUCKET UNIT TROLLEY	
	Sabit Sistem Gügüm Ünitesi Taşıma Arabası	68
	BUCKET TROLLEY	
	Gügüm Taşıma Arabası (İkili)	69

	DOUBLE MILKING MACHINES FOR COWS <i>İkili Sağım Makinesi (Büyükbaş)</i>	70-71
	DOUBLE MILKING MACHINES FOR COWS (TWIN BUCKET) <i>İkili Sağım Makinesi Çift Gügümlü (Büyükbaş)</i>	72-73
	DOUBLE MILKING MACHINES FOR GOATS <i>İkili Sağım Makinesi (Keçi)</i>	74-75
	DOUBLE MILKING MACHINES FOR GOATS (TWIN BUCKET) <i>İkili Sağım Makinesi Çift Gügümlü (Keçi)</i>	76-77
	DOUBLE MILKING MACHINES FOR SHEEPS <i>İkili Sağım Makinesi (Koyun)</i>	78-79
	DOUBLE MILKING MACHINES FOR SHEEPS (TWIN BUCKET) <i>İkili Sağım Makinesi Çift Gügümlü (Koyun)</i>	80-81
	SINGLE MILKING MACHINES FOR COWS <i>Tekli Sağım Makinesi (Büyükbaş)</i>	82-83
	SINGLE MILKING MACHINES FOR COWS (JUNIOR) <i>Tekli Sağım Makinesi (Büyükbaş)</i>	84-85
	SINGLE MILKING MACHINES FOR GOATS <i>Tekli Sağım Makinesi (Keçi)</i>	86-87
	SINGLE MILKING MACHINES FOR GOATS (JUNIOR) <i>Tekli Sağım Makinesi (Keçi)</i>	88-89

**SINGLE MILKING MACHINES FOR SHEEPS**

Tekli Sağım Makinesi (Koyun)..... 90-91

**SINGLE MILKING MACHINES FOR SHEEPS (JUNIOR)**

Tekli Sağım Makinesi (Koyun)..... 92-93

**FIXED SYSTEM BUCKET UNIT TROLLEY**

Sabit Sistem Güğüm Ünitesi Taşıma Arabası..... 94

**FIXED SYSTEM VACUUM PUMP**

Sabit Sistem Vakum Pompa..... 95

**FIXED SYSTEM & SINGLE MILK BUCKET UNIT**

Tek Güğüm Üniteli Sabit Sistem (Büyükbaş)..... 96-99

**FARM EQUIPMENT**

Çiftlik Ekipmanları..... 102-105

**MELASTY MILKING MACHINE SPARE PARTS**

Melasty Süt Sağım Makinaları Yedek Parçaları..... 106-110

TK 2-PS

DOUBLE MILKING MACHINES FOR COWS

İkili Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

CHASSIS

	BOX
Length (cm)	150
Width (cm)	70
Height (cm)	105
Weight (kg)	60,1

BOX

85
62
87
63,8

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4,9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TY 2-PS)
-----------	----------------------





OPTİONAL

TK 2-PK

DOUBLE MILKING MACHINES FOR COWS

İkili Sağım Makinesi (Büyükbaş)



MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TY 2-PK)
-----------	----------------------

TK 2-AS

DOUBLE MILKING MACHINES FOR COWS

İkili Sağım Makinesi (Büyükbaş)



MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TY 2-AS)
-----------	----------------------

TK 2-AK

DOUBLE MILKING MACHINES FOR COWS

İkili Sağım Makinesi (Büyükbaş)



MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TY 2-AK)
-----------	----------------------



D

Z

E

T R

I

TK 2-PS(G.E)

DOUBLE MILKING MACHINES FOR COWS

İkili Sağım Makinesi (Büyükbaş)



ENGINE FEATURES

Net Horse Power Output	: (7hp) at 3,600 r/min
Engine Type	: Air-cooled, 4-Stroke
Fuel Type	: Unleaded Gasoline

TECHNICAL FEATURES

CHASSIS	
Length (cm)	: 150
Width (cm)	: 70
Height (cm)	: 115
Weight (kg)	: 85,2

BOX	
85	
62	
119	
92,6	

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4,9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TY 2-PS(G.E))
-----------	---------------------------





OPTIONAL

TK 2-PK(G.E.)

DOUBLE MILKING MACHINES FOR COWS İkili Sağım Makinesi (Büyükbaş)



MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TY2-PK(G.E))
-----------	--------------------------

TK 2-AS(G.E.)

DOUBLE MILKING MACHINES FOR COWS İkili Sağım Makinesi (Büyükbaş)



MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TY 2-AS(G.E))
-----------	---------------------------

TK 2-AK(G.E.)

DOUBLE MILKING MACHINES FOR COWS İkili Sağım Makinesi (Büyükbaş)



MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TY 2-AK(G.E))
-----------	---------------------------

TK 2-2 PS

DOUBLE MILKING MACHINES FOR COWS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Büyükbaş)



TECHNICAL FEATURES

CHASSIS

	BOX
Length (cm)	150
Width (cm)	81
Height (cm)	105
Weight (kg)	68,8

BOX

90
83
87
74,4

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4,9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TY 2-2 PS)
-----------	------------------------





OPTIONAL

TK 2-2 PK

DOUBLE MILKING MACHINES FOR COWS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TY 2-2 PK)
-----------	------------------------

TK 2-2 AS

DOUBLE MILKING MACHINES FOR COWS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240 cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TY 2-2 AS)
-----------	------------------------

TK 2-2 AK

DOUBLE MILKING MACHINES FOR COWS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TY 2-2 AK)
-----------	------------------------





TECHNICAL FEATURES

CHASSIS

Length (cm) : 170
Width (cm) : 93
Height (cm) : 145
Weight (kg) : 165

VACUUM PUMP

Engine Power (kW) : 1,1 kW
Rotating (rpm) : 1400 rpm
Voltage (V) : 220 V
Flow Rate (L/min) : 350-400
Palette Type : Fiber
Palette Size (mm) : 4,85 x 41,50 x 69,95
Tank Capacity (L) : 30

MILKING GROUP

Bucket Type : S/S
Bucket Volume : 4 x 30 Lt.
Cluster Weight (gr) : 4 x 2270 Gr.
Milk Claw Capacity : 4 x 340cc
Milk Hose : 4 x 4000mm (25mm x 16mm)
Pulse Hose : 4 x 4000mm (25mm x 16mm)
Pulse Hose : 4 x 4000mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump

TY 4-4 PS 70 BB	Dörtlü Sağım Makinesi Dört Güğümlü (Büyükbaş) (300/400 Lt/Dk)
TY 4-4 PK 70 BB	Dörtlü Sağım Makinesi Dört Güğümlü (Büyükbaş) (300/400 Lt/Dk)
TY 4-4 AS 70 BB	Dörtlü Sağım Makinesi Dört Güğümlü (Büyükbaş) (300/400 Lt/Dk)
TY 4-4 AK 70 BB	Dörtlü Sağım Makinesi Dört Güğümlü (Büyükbaş) (300/400 Lt/Dk)



D

Z

E

R

T

TKKC 4-PS

DOUBLE MILKING MACHINES FOR GOATS

İkili Sağım Makinesi (Keçi)



TECHNICAL FEATURES

CHASSIS	BOX
Length (cm)	150
Width (cm)	70
Height (cm)	105
Weight (kg)	58.7
	85
	62
	87
	62,4

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 4-PS)
-----------	------------------------





OPTIONAL

TKKC 4-PK

DOUBLE MILKING MACHINES FOR GOATS

İkili Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 4-PK)
-----------	------------------------

TKKC 4-AS

DOUBLE MILKING MACHINES FOR GOATS

İkili Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 4-AS)
-----------	------------------------

TKKC 4-AK

DOUBLE MILKING MACHINES FOR GOATS

İkili Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 4-AK)
-----------	------------------------



D

Z

E

R

T

TKKC 4-PS(G.E.)

ENGINE FEATURES

DOUBLE MILKING MACHINES FOR GOATS

İkili Sağım Makinesi (Keçi)



Net Horse Power Output	: (7hp) at 3,600 r/min
Engine Type	: Air-cooled, 4-Stroke
Fuel Type	: Unleaded Gasoline

TECHNICAL FEATURES

CHASSIS

Length (cm)	: 150	BOX	85
Width (cm)	: 70		62
Height (cm)	: 115		119
Weight (kg)	: 83,8		91,2

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 4-PS(G.E))
-----------	-----------------------------





OPTIONAL

TKKC 4-PK(G.E.)

DOUBLE MILKING MACHINES FOR GOATS

İkili Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 4-PK(G.E))
-----------	-----------------------------

TKKC 4-AS(G.E.)

DOUBLE MILKING MACHINES FOR GOATS

İkili Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 4-AS(G.E))
-----------	-----------------------------

TKKC 4-AK(G.E.)

DOUBLE MILKING MACHINES FOR GOATS

İkili Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 4-AK(G.E))
-----------	-----------------------------



D

Z

E

R

T

TKKC 4-2 PS

DOUBLE MILKING MACHINES FOR GOATS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümülü (Keçi)



TECHNICAL FEATURES

CHASSIS	BOX
Length (cm)	150
Width (cm)	81
Height (cm)	105
Weight (kg)	67.4

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (TYKC 4-2 PS)

20 ft		28x
40 ft		56x
40 ft High Cube		84x



OPTIONAL

TKKC 4-2 PK

DOUBLE MILKING MACHINES FOR GOATS (TWIN BUCKET)
İkili Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 4-2 PK)
-----------	--------------------------

TKKC 4-2 AS

DOUBLE MILKING MACHINES FOR GOATS (TWIN BUCKET)
İkili Sağım Makinesi Çift Gügümlü (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 4-2 AS)
-----------	--------------------------

TKKC 4-2 AK

DOUBLE MILKING MACHINES FOR GOATS (TWIN BUCKET)
İkili Sağım Makinesi Çift Gügümlü (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 4-2 AK)
-----------	--------------------------



D

N

E

R

T

TKKY 4-PS

DOUBLE MILKING MACHINES FOR SHEEPS

İkili Sağım Makinesi (Koyun)



TECHNICAL FEATURES

CHASSIS	BOX
Length (cm)	150
Width (cm)	70
Height (cm)	105
Weight (kg)	57,9
	85
	62
	87
	61,6

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4,9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (TYKY 4-PS)





OPTIONAL

TKKY 4-PK

DOUBLE MILKING MACHINES FOR SHEEPS

İkili Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKY 4-PK)
-----------	------------------------

TKKY 4-AS

DOUBLE MILKING MACHINES FOR SHEEPS

İkili Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKY 4-AS)
-----------	------------------------

TKKY 4-AK

DOUBLE MILKING MACHINES FOR SHEEPS

İkili Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKY 4-AK)
-----------	------------------------



D

Z

E

R

T

TKKY 4-PS(G.E.)

DOUBLE MILKING MACHINES FOR SHEEPS

İkili Sağım Makinesi (Koyun)



ENGINE FEATURES

Net Horse Power Output	: (7hp) at 3,600 r/min
Engine Type	: Air-cooled, 4-Stroke
Fuel Type	: Unleaded Gasoline

TECHNICAL FEATURES

CHASSIS	BOX
Length (cm)	: 150
Width (cm)	: 70
Height (cm)	: 105
Weight (kg)	: 83
	: 90,4

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKY 4-PS(G.E))
-----------	-----------------------------





OPTIONAL

TKKY 4-PK(G.E.)

DOUBLE MILKING MACHINES FOR SHEEPS

İkili Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (TYKY 4-PK(G.E))

TKKY 4-AS(G.E.)

DOUBLE MILKING MACHINES FOR SHEEPS

İkili Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (TYKY 4-AS(G.E))

TKKY 4-AK(G.E.)

DOUBLE MILKING MACHINES FOR SHEEPS

İkili Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (TYKY 4-AK(G.E))

D

Z

E

R

T

TKKY 4-2 PS

DOUBLE MILKING MACHINES FOR SHEEPS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Koyun)



TECHNICAL FEATURES

CHASSIS	BOX
Length (cm)	150
Width (cm)	81
Height (cm)	105
Weight (kg)	66,6
	90
	83
	87
	72,2

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4,9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKY 4-2 PS)
-----------	--------------------------





OPTIONAL

TKKY 4-2 PK

DOUBLE MILKING MACHINES FOR SHEEPS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKY 4-2 PK)
-----------	--------------------------

TKKY 4-2 AS

DOUBLE MILKING MACHINES FOR SHEEPS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKY 4-2 AS)
-----------	--------------------------

TKKY 4-2 AK

DOUBLE MILKING MACHINES FOR SHEEPS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKY 4-2 AK)
-----------	--------------------------

TK 1-PS

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

CHASSIS

	BOX
Length (cm)	150
Width (cm)	63
Height (cm)	100
Weight (kg)	53,5

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4,9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TY 1-PS)
-----------	----------------------





TK 1-PK

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (TY 1-PK)

TK 1-AS

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (TY 1-AS)

TK 1-AK

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (TY 1-AK)

TK 1-PS(G.E.)

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



ENGINE FEATURES

Net Horse Power Output	: (7hp) at 3,600 r/min
Engine Type	: Air-cooled, 4-Stroke
Fuel Type	: Unleaded Gasoline

TECHNICAL FEATURES

CHASSIS		BOX
Length (cm)	: 150	85
Width (cm)	: 63	62
Height (cm)	: 115	119
Weight (kg)	: 78,6	86

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TY 1-PS(G.E))
-----------	---------------------------





OPTIONAL

TK 1-PK(G.E.)

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TY 1-PK(G.E))
-----------	---------------------------

TK 1-AS(G.E.)

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TY 1-AS(G.E))
-----------	---------------------------

TK 1-AK(G.E.)

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TY 1-AK(G.E))
-----------	---------------------------



R

O

N

U

J

TJK 1-PS

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

CHASSIS

	BOX
Length (cm)	115
Width (cm)	54
Height (cm)	78
Weight (kg)	44,7

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 160-180
Palette Type	: Graphite
Palette Size (mm)	: 70 x 43 x 4,9
Tank Capacity (L)	: 4

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2050 Gr.
Milk Claw Capacity	: 200 cc
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)





OPTIONAL

TJK 1-PK

SINGLE MILKING MACHINES FOR COWS
Tekli Sağım Makinesi (Büyükbaş)



TJK 1-AS

SINGLE MILKING MACHINES FOR COWS
Tekli Sağım Makinesi (Büyükbaş)



TJK 1-AK

SINGLE MILKING MACHINES FOR COWS
Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2050 Gr.
Milk Claw Capacity	: 200 cc
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2050 Gr.
Milk Claw Capacity	: 200 cc
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2050 Gr.
Milk Claw Capacity	: 200 cc
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)



E C O M I N

TEK 1-PS

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

CHASSIS	BOX
Length (cm) : 125	67
Width (cm) : 52	52
Height (cm) : 89	75
Weight (kg) : 46,5	49

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 160-180
Palette Type	: Graphite
Palette Size (mm)	: 70 x 43 x 4.9
Tank Capacity (L)	: 4

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2050 Gr.
Milk Claw Capacity	: 200 cc
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)





TEK 1-PK

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2050 Gr.
Milk Claw Capacity	: 200 cc
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

TEK 1-AS

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2050 Gr.
Milk Claw Capacity	: 200 cc
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

TEK 1-AK

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2050 Gr.
Milk Claw Capacity	: 200 cc
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)



TCK 1-PS

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

CHASSIS

	BOX
Length (cm)	125
Width (cm)	52
Height (cm)	52
Weight (kg)	46,7

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 160-180
Palette Type	: Graphite
Palette Size (mm)	: 70 x 43 x 4.9
Tank Capacity (L)	: 4

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2050 Gr.
Milk Claw Capacity	: 200 cc
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)





OPTIONAL

TCK 1-PK

SINGLE MILKING MACHINES FOR COWS
Tekli Sağım Makinesi (Büyükbaş)



TCK 1-AS

SINGLE MILKING MACHINES FOR COWS
Tekli Sağım Makinesi (Büyükbaş)



TCK 1-AK

SINGLE MILKING MACHINES FOR COWS
Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2050 Gr.
Milk Claw Capacity	: 200 cc
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2050 Gr.
Milk Claw Capacity	: 200 cc
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2050 Gr.
Milk Claw Capacity	: 200 cc
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)



D

Z

E

R

T

TKKC 2-PS

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

CHASSIS	BOX
Length (cm) : 150	85
Width (cm) : 63	62
Height (cm) : 100	87
Weight (kg) : 53,4	57,1

VACUUM PUMP

Engine Power (kW) : 0,55 kW
Rotating (rpm) : 1450 rpm
Voltage (V) : 220 V
Flow Rate (L/min) : 180-200
Palette Type : Graphite
Palette Size (mm) : 80 x 43 x 4.9
Tank Capacity (L) : 18

MILKING GROUP

Bucket Type : S/S
Bucket Volume : 30 Lt.
Cluster Weight (gr) : 2 x 490 Gr.
Milk Claw Capacity :
Milk Claw Type : 2 Unit (4 x Universal Claw)
Milk Hose : 225mm (24mm x 14mm)
Pulse Hose : 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 2-PS)
-----------	------------------------





OPTIONAL

TKKC 2-PK

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 2-PK)
-----------	------------------------

TKKC 2-AS

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 2-AS)
-----------	------------------------

TKKC 2-AK

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 2-AK)
-----------	------------------------



D

Z

E

R

T

TKKC 2-PS(G.E.)

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



ENGINE FEATURES

Net Horse Power Output	: (7hp) at 3,600 r/min
Engine Type	: Air-cooled, 4-Stroke
Fuel Type	: Unleaded Gasoline

TECHNICAL FEATURES

CHASSIS		BOX
Length (cm)	: 150	85
Width (cm)	: 63	62
Height (cm)	: 115	119
Weight (kg)	: 78,5	85,9

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 2-PS(G.E))
-----------	-----------------------------





OPTIONAL

TKKC 2-PK(G.E.)

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 2-PK(G.E))
-----------	-----------------------------

TKKC 2-AS(G.E.)

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 2-AS(G.E))
-----------	-----------------------------

TKKC 2-AK(G.E.)

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKC 2-AK(G.E))
-----------	-----------------------------

TJKC 2-PS

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

CHASSIS	BOX
Length (cm) : 115	67
Width (cm) : 54	53
Height (cm) : 87	78
Weight (kg) : 45,1	47,7

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 160-180
Palette Type	: Graphite
Palette Size (mm)	: 70 x 43 x 4.9
Tank Capacity (L)	: 4

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)





OPTIONAL

TJKKC 2-PK

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

TJKKC 2-AS

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

TJKKC 2-AK

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)



E
C
O
M
I
N

TEKKC 2-PS

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

CHASSIS	BOX
Length (cm)	125
Width (cm)	52
Height (cm)	75
Weight (kg)	48,3

VACUUM PUMP

Engine Power (kW)	0,55 kW
Rotating (rpm)	1450 rpm
Voltage (V)	220 V
Flow Rate (L/min)	160-180
Palette Type	Graphite
Palette Size (mm)	70 x 43 x 4.9
Tank Capacity (L)	4

MILKING GROUP

Bucket Type	S/S
Bucket Volume	25 Lt.
Cluster Weight (gr)	2 x 490 Gr.
Milk Claw Capacity	
Milk Claw Type	2 Unit (4 x Universal Claw)
Milk Hose	200mm (22mm x 14mm)
Pulse Hose	175mm (14mm x 7mm)





OPTIONAL

TEKKC 2-PK

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

TEKKC 2-AS

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

TEKKC 2-AK

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)



TCKKC 2-PS

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

CHASSIS

	BOX
Length (cm)	125
Width (cm)	52
Height (cm)	52
Weight (kg)	47,4

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 160-180
Palette Type	: Graphite
Palette Size (mm)	: 70 x 43 x 4.9
Tank Capacity (L)	: 4

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)





OPTIONAL

TCKKC 2-PK

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

TCKKC 2-AS

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

TCKKC 2-AK

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)



D

Z

E

R

T

TKKY 2-PS

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

CHASSIS	BOX
Length (cm) : 150	85
Width (cm) : 63	62
Height (cm) : 100	87
Weight (kg) : 53	56,7

VACUUM PUMP

Engine Power (kW) : 0,55 kW
Rotating (rpm) : 1450 rpm
Voltage (V) : 220 V
Flow Rate (L/min) : 180-200
Palette Type : Graphite
Palette Size (mm) : 80 x 43 x 4,9
Tank Capacity (L) : 18

MILKING GROUP

Bucket Type : S/S
Bucket Volume : 30 Lt.
Cluster Weight (gr) : 2 x 375 Gr.
Milk Claw Capacity :
Milk Claw Type : 2 Unit (4 x Universal Claw)
Milk Hose : 225mm (24mm x 14mm)
Pulse Hose : 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKY 2-PS)
-----------	------------------------





OPTIONAL

TKKY 2-PK

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKY 2-PK)
-----------	------------------------

TKKY 2-AS

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKY 2-AS)
-----------	------------------------

TKKY 2-AK

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKY 2-AK)
-----------	------------------------

TKKY 2-PS(G.E.)

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



ENGINE FEATURES

Net Horse Power Output	: (7hp) at 3,600 r/min
Engine Type	: Air-cooled, 4-Stroke
Fuel Type	: Unleaded Gasoline

TECHNICAL FEATURES

CHASSIS	BOX
Length (cm)	: 150
Width (cm)	: 63
Height (cm)	: 115
Weight (kg)	: 78,1
	: 85
	: 62
	: 87
	: 85,5

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKY 2-PS(G.E))
-----------	-----------------------------





OPTIONAL

TKKY 2-PK(G.E.)

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKY 2-PK(G.E))
-----------	-----------------------------

TKKY 2-AS(G.E.)

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKY 2-AS(G.E))
-----------	-----------------------------

TKKY 2-AK(G.E.)

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYKY 2-AK(G.E))
-----------	-----------------------------



TJKKY 2-PS

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

CHASSIS	BOX
Length (cm)	115
Width (cm)	54
Height (cm)	87
Weight (kg)	44,7
	67
	53
	78
	47,3

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 160-180
Palette Type	: Graphite
Palette Size (mm)	: 70 x 43 x 4,9
Tank Capacity (L)	: 4

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)





TJKKY 2-PK

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

TJKKY 2-AS

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

TJKKY 2-AK

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

O P T I O N A L

E
C
O
M
I
N

TEKKY 2-PS

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

CHASSIS	BOX
Length (cm) : 125	67
Width (cm) : 52	52
Height (cm) : 89	75
Weight (kg) : 45,4	47,9

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 160-180
Palette Type	: Graphite
Palette Size (mm)	: 70 x 43 x 4,9
Tank Capacity (L)	: 4

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)





TEKKY 2-PK

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

TEKKY 2-AS

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

TEKKY 2-AK

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

O P T I O N A L



TCKKY 2-PS

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

CHASSIS

	BOX
Length (cm)	125
Width (cm)	52
Height (cm)	89
Weight (kg)	44,1
	45,6

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 160-180
Palette Type	: Graphite
Palette Size (mm)	: 70 x 43 x 4,9
Tank Capacity (L)	: 4

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)





TCKKY 2-PK

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

TCKKY 2-AS

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

TCKKY 2-AK

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

O P T I O N A L



D

Z

E

R

T

MILK BUCKET UNIT FOR COWS

Süt Gögüm Ünitesi (Büyükbaş)

1 PS



TECHNICAL FEATURES

CHASSIS

Length (cm)	: 40	BOX	38
Width (cm)	: 40		38
Height (cm)	: 65		69
Weight (kg)	: 10,9		12,2

MILKING GROUP

Liner Type	: Long Liner Silicone
Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

1 PK



TECHNICAL FEATURES

CHASSIS

Length (cm)	: 40	BOX	38
Width (cm)	: 40		38
Height (cm)	: 65		69
Weight (kg)	: 10,9		12,2

MILKING GROUP

Liner Type	: Long Liner Rubber
Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

1 AS



TECHNICAL FEATURES

CHASSIS

Length (cm)	: 40	BOX	38
Width (cm)	: 40		38
Height (cm)	: 65		69
Weight (kg)	: 9,4		10,7

MILKING GROUP

Liner Type	: Long Liner Silicone
Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

1 AK



TECHNICAL FEATURES

CHASSIS

Length (cm)	: 40	BOX	38
Width (cm)	: 40		38
Height (cm)	: 65		69
Weight (kg)	: 9,4		10,7

MILKING GROUP

Liner Type	: Long Liner Rubber
Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

TKS

FIXED SYSTEM VACUUM PUMP

Sabit Sistem Vakum Pompa



TECHNICAL FEATURES

CHASSIS

	BOX
Length (cm)	51
Width (cm)	33
Height (cm)	77
Weight (kg)	34,5

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4,9
Tank Capacity (L)	: 18

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYS)
-----------	------------------



D

Z

E

R

T

TKS - 1 PS

FIXED SYSTEM & SINGLE MILK BUCKET UNIT

Tek Güğüm Üniteli Sabit Sistem (Büyükbaş)



TECHNICAL FEATURES

CHASSIS

Length (cm)	: 33
Width (cm)	: 50
Height (cm)	: 73
Weight (kg)	: 35

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Liner Type	: Long Liner Silicone
Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYS - 1 PS)
-----------	-------------------------

TKS - 1 PK

FIXED SYSTEM & SINGLE MILK BUCKET UNIT

Tek Gügüm Üniteli Sabit Sistem (Büyükbaş)



TECHNICAL FEATURES

CHASSIS

Length (cm)	: 33
Width (cm)	: 50
Height (cm)	: 73
Weight (kg)	: 35

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Liner Type	: Long Liner Rubber
Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (TYS - 1 PK)
-----------	-------------------------



D

Z

E

R

T

TKS - 1 AS

FIXED SYSTEM & SINGLE MILK BUCKET UNIT

Tek Güğüm Üniteli Sabit Sistem (Büyükbaş)



TECHNICAL FEATURES

CHASSIS

Length (cm)	: 33
Width (cm)	: 50
Height (cm)	: 73
Weight (kg)	: 35

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Liner Type	: Long Liner Silicone
Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (TYS - 1 AS)

TKS - 1 AK

FIXED SYSTEM & SINGLE MILK BUCKET UNIT

Tek Gügüm Üniteli Sabit Sistem (Büyükbaş)



TECHNICAL FEATURES

CHASSIS

Length (cm)	: 33
Width (cm)	: 50
Height (cm)	: 73
Weight (kg)	: 35

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Liner Type	: Long Liner Rubber
Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (TYS - 1 AK)

R
E
N
E
Z
U



FIXED SYSTEM BUCKET UNIT TROLLEY

Sabit Sistem Gögüm Ünitesi Taşıma Arabası

TT 2-PS



TECHNICAL FEATURES

CHASSIS

	BOX
Length (cm)	120
Width (cm)	70
Height (cm)	100
Weight (kg)	27,9

MILKING GROUP

Liner Type	: Long Liner Silicone
Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

TT 2-PK



TECHNICAL FEATURES

CHASSIS

	BOX
Length (cm)	120
Width (cm)	70
Height (cm)	100
Weight (kg)	27,9

MILKING GROUP

Liner Type	: Long Liner Rubber
Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

TT 2-AS



TECHNICAL FEATURES

CHASSIS

	BOX
Length (cm)	120
Width (cm)	70
Height (cm)	100
Weight (kg)	26

MILKING GROUP

Liner Type	: Long Liner Silicone
Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

TT 2-AK



TECHNICAL FEATURES

CHASSIS

	BOX
Length (cm)	120
Width (cm)	70
Height (cm)	100
Weight (kg)	26

MILKING GROUP

Liner Type	: Long Liner Rubber
Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

DBT 2

BUCKET TROLLEY

Gügüm Taşıma Arabası (İkili)



TECHNICAL FEATURES

CHASSIS

Length (cm)	: 130
Width (cm)	: 60
Height (cm)	: 88
Weight (kg)	: 9,4

BOX

87
62
30
10,4

D
R
E
A
M



DREAM

L

R

D

DK 2-PS

DOUBLE MILKING MACHINES FOR COWS

İkili Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

CHASSIS	BOX
Length (cm)	150
Width (cm)	85
Height (cm)	70
Weight (kg)	62
	87
	63,8

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (DY 2-PS)

20 ft		48x	
40 ft		102x	
40 ft High Cube		153x	



OPTIONAL

DK 2-PK

DOUBLE MILKING MACHINES FOR COWS

İkili Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DY 2-PK)
-----------	----------------------

DK 2-AS

DOUBLE MILKING MACHINES FOR COWS

İkili Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240 cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DY 2-AS)
-----------	----------------------

DK 2-AK

DOUBLE MILKING MACHINES FOR COWS

İkili Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240 cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DY 2-AK)
-----------	----------------------

DK 2-2 PS

DOUBLE MILKING MACHINES FOR COWS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Büyükbaş)



TECHNICAL FEATURES

CHASSIS

	BOX
Length (cm)	150
Width (cm)	81
Height (cm)	105
Weight (kg)	68,8
	74,4

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240 cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (DY 2-2 PS)

20 ft		28x
40 ft		56x
40 ft High Cube		84x



O
P
T
I
O
N
A
L

DK 2-2 PK

DOUBLE MILKING MACHINES FOR COWS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240 cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DY 2-2 PK)
-----------	------------------------

DK 2-2 AS

DOUBLE MILKING MACHINES FOR COWS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240 cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DY 2-2 AS)
-----------	------------------------

DK 2-2 AK

DOUBLE MILKING MACHINES FOR COWS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240 cc
Milk Hose	: 2 x 225mm (25mm x 16mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DY 2-2 AK)
-----------	------------------------

DKKC 4-PS

DOUBLE MILKING MACHINES FOR GOATS

İkili Sağım Makinesi (Keçi)



TECHNICAL FEATURES

CHASSIS	BOX
Length (cm)	150
Width (cm)	70
Height (cm)	105
Weight (kg)	58,7
	85
	62
	87
	62,4

VACUUM PUMP

Engine Power (kW)	0,55 kW
Rotating (rpm)	1450 rpm
Voltage (V)	220 V
Flow Rate (L/min)	180-200
Palette Type	Graphite
Palette Size (mm)	80 x 43 x 4.9
Tank Capacity (L)	18

MILKING GROUP

Bucket Type	S/S
Bucket Volume	40 Lt.
Cluster Weight (gr)	4 x 490 Gr.
Milk Claw Capacity	
Milk Claw Type	4 Unit (8 x Universal Claw)
Milk Hose	2 x 225mm (24mm x 14mm)
Pulse Hose	2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKC 4-PS)
-----------	------------------------





OPTIONAL

DKKC 4-PK

DOUBLE MILKING MACHINES FOR GOATS

İkili Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKC 4-PK)
-----------	------------------------

DKKC 4-AS

DOUBLE MILKING MACHINES FOR GOATS

İkili Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKC 4-AS)
-----------	------------------------

DKKC 4-AK

DOUBLE MILKING MACHINES FOR GOATS

İkili Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKC 4-AK)
-----------	------------------------

DKKC 4-2 PS

DOUBLE MILKING MACHINES FOR GOATS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Keçi)



TECHNICAL FEATURES

CHASSIS	BOX
Length (cm)	150
Width (cm)	81
Height (cm)	105
Weight (kg)	67,4
	90
	83
	87
	73

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKC 4-2 PS)
-----------	--------------------------

20 ft		28x
40 ft		56x
40 ft High Cube		84x



OPTIONAL

DKKC 4-2 PK

DOUBLE MILKING MACHINES FOR GOATS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKC 4-2 PK)
-----------	--------------------------

DKKC 4-2 AS

DOUBLE MILKING MACHINES FOR GOATS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKC 4-2 AS)
-----------	--------------------------

DKKC 4-2 AK

DOUBLE MILKING MACHINES FOR GOATS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 4 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKC 4-2 AK)
-----------	--------------------------



DREAM

DKKY 4-PS

DOUBLE MILKING MACHINES FOR SHEEPS

İkili Sağım Makinesi (Koyun)



TECHNICAL FEATURES

CHASSIS

	BOX
Length (cm)	150
Width (cm)	70
Height (cm)	105
Weight (kg)	57,9

BOX

85
62
87
61,6

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4,9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (DYKY 4-PS)

20 ft		48x	
40 ft		102x	
40 ft High Cube		153x	



OPTIONAL

DKKY 4-PK

DOUBLE MILKING MACHINES FOR SHEEPS
İkili Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKY 4-PK)
-----------	------------------------

DKKY 4-AS

DOUBLE MILKING MACHINES FOR SHEEPS
İkili Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKY 4-AS)
-----------	------------------------

DKKY 4-AK

DOUBLE MILKING MACHINES FOR SHEEPS
İkili Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKY 4-AK)
-----------	------------------------



DREAM

DKKY 4-2 PS

DOUBLE MILKING MACHINES FOR SHEEPS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Koyun)



TECHNICAL FEATURES

CHASSIS

	BOX
Length (cm)	150
Width (cm)	81
Height (cm)	105
Weight (kg)	66,6
	72,2

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (DYKY 4-2 PS)

20 ft		28x
40 ft		56x
40 ft High Cube		84x



OPTIONAL

DKKY 4-2 PK

DOUBLE MILKING MACHINES FOR SHEEPS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKY 4-2 PK)
-----------	--------------------------

DKKY 4-2 AS

DOUBLE MILKING MACHINES FOR SHEEPS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKY 4-2 AS)
-----------	--------------------------

DKKY 4-2 AK

DOUBLE MILKING MACHINES FOR SHEEPS (TWIN BUCKET)

İkili Sağım Makinesi Çift Gügümlü (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 2 x 30 Lt.
Cluster Weight (gr)	: 4 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 4 Unit (8 x Universal Claw)
Milk Hose	: 2 x 225mm (24mm x 14mm)
Pulse Hose	: 2 x 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKY 4-2 AK)
-----------	--------------------------

DK 1-PS

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

CHASSIS	BOX
Length (cm)	150
Width (cm)	63
Height (cm)	100
Weight (kg)	53,5
	85
	62
	87
	57,2

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (DY 1-PS)

20 ft		48x	
40 ft		102x	
40 ft High Cube		153x	



OPTIONAL

DK 1-PK

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (DY 1-PK)

DK 1-AS

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (DY 1-AS)

DK 1-AK

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (DY 1-AK)

DJK 1-PS

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

CHASSIS	BOX
Length (cm)	115
Width (cm)	54
Height (cm)	87
Weight (kg)	44,7
	67
	53
	78
	47,3

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 160-180
Palette Type	: Graphite
Palette Size (mm)	: 70 x 43 x 4,9
Tank Capacity (L)	: 4

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2050 Gr.
Milk Claw Capacity	: 200 cc
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)





OPTIONAL

DJK 1-PK

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2050 Gr.
Milk Claw Capacity	: 200 cc
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

DJK 1-AS

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2050 Gr.
Milk Claw Capacity	: 200 cc
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

DJK 1-AK

SINGLE MILKING MACHINES FOR COWS

Tekli Sağım Makinesi (Büyükbaş)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2050 Gr.
Milk Claw Capacity	: 200 cc
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

DKKC 2-PS

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

CHASSIS	BOX
Length (cm)	150
Width (cm)	63
Height (cm)	100
Weight (kg)	53,4
	85
	62
	87
	57,1

VACUUM PUMP

Engine Power (kW)	0,55 kW
Rotating (rpm)	1450 rpm
Voltage (V)	220 V
Flow Rate (L/min)	180-200
Palette Type	Graphite
Palette Size (mm)	80 x 43 x 4.9
Tank Capacity (L)	18

MILKING GROUP

Bucket Type	S/S
Bucket Volume	30 Lt.
Cluster Weight (gr)	2 x 490 Gr.
Milk Claw Capacity	
Milk Claw Type	2 Unit (4 x Universal Claw)
Milk Hose	225mm (24mm x 14mm)
Pulse Hose	200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKC 2-PS)
-----------	------------------------





OPTIONAL

DKKC 2-PK

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKC 2-PK)
-----------	------------------------

DKKC 2-AS

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKC 2-AS)
-----------	------------------------

DKKC 2-AK

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKC 2-AK)
-----------	------------------------



R

O

I

N

U

J

DJKC 2-PS

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

CHASSIS

	BOX
Length (cm)	115
Width (cm)	54
Height (cm)	87
Weight (kg)	45,1

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 160-180
Palette Type	: Graphite
Palette Size (mm)	: 70 x 43 x 4.9
Tank Capacity (L)	: 4

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)





OPTIONAL

DJKKC 2-PK

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

DJKKC 2-AS

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

DJKKC 2-AK

SINGLE MILKING MACHINES FOR GOATS

Tekli Sağım Makinesi (Keçi)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 490 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)



DREAM

DKKY 2-PS

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

CHASSIS	BOX
Length (cm)	150
Width (cm)	63
Height (cm)	100
Weight (kg)	53
	56,7

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (DYKY 2-PS)





OPTIONAL

DKKY 2-PK

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKY 2-PK)
-----------	------------------------

DKKY 2-AS

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKY 2-AS)
-----------	------------------------

DKKY 2-AK

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 225mm (24mm x 14mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYKY 2-AK)
-----------	------------------------



R

O

I

N

U

J

DJKKY 2-PS

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

CHASSIS

	BOX
Length (cm)	115
Width (cm)	54
Height (cm)	87
Weight (kg)	44,7

BOX

67
53
78
47,3

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 160-180
Palette Type	: Graphite
Palette Size (mm)	: 70 x 43 x 4,9
Tank Capacity (L)	: 4

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)





OPTIONAL

DJKKY 2-PK

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: S/S
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

DJKKY 2-AS

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)

DJKKY 2-AK

SINGLE MILKING MACHINES FOR SHEEPS

Tekli Sağım Makinesi (Koyun)



TECHNICAL FEATURES

MILKING GROUP

Bucket Type	: Aluminum
Bucket Volume	: 25 Lt.
Cluster Weight (gr)	: 2 x 375 Gr.
Milk Claw Capacity	:
Milk Claw Type	: 2 Unit (4 x Universal Claw)
Milk Hose	: 200mm (22mm x 14mm)
Pulse Hose	: 175mm (14mm x 7mm)



FIXED SYSTEM BUCKET UNIT TROLLEY

Sabit Sistem Gүгүм Ünitesi Taşima Arabası

DT 2-PS



TECHNICAL FEATURES

CHASSIS

Length (cm)	: 120	BOX	70
Width (cm)	: 70		63
Height (cm)	: 100		98
Weight (kg)	: 27,9		28,9

MILKING GROUP

Liner Type	: Long Liner Silicone
Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

DT 2-AS



TECHNICAL FEATURES

CHASSIS

Length (cm)	: 120	BOX	70
Width (cm)	: 70		63
Height (cm)	: 100		95
Weight (kg)	: 26		27

MILKING GROUP

Liner Type	: Long Liner Silicone
Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

DT 2-PK



TECHNICAL FEATURES

CHASSIS

Length (cm)	: 120	BOX	70
Width (cm)	: 70		63
Height (cm)	: 100		98
Weight (kg)	: 27,9		28,9

MILKING GROUP

Liner Type	: Long Liner Rubber
Bucket Type	: S/S
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

DT 2-AK



TECHNICAL FEATURES

CHASSIS

Length (cm)	: 120	BOX	70
Width (cm)	: 70		63
Height (cm)	: 100		95
Weight (kg)	: 26		27

MILKING GROUP

Liner Type	: Long Liner Rubber
Bucket Type	: Aluminum
Bucket Volume	: 40 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 2 x 240cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

DKS

FIXED SYSTEM VACUUM PUMP

Sabit Sistem Vakum Pompa



TECHNICAL FEATURES

CHASSIS

Length (cm)	: 51
Width (cm)	: 33
Height (cm)	: 77
Weight (kg)	: 34,5

BOX

53
35
77
36

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4,9
Tank Capacity (L)	: 18

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYS)
-----------	------------------

D
R
E
M
A
N



DREAM

LIL

R

D

DKS - 1 PS

FIXED SYSTEM & SINGLE MILK BUCKET UNIT

Tek Güğüm Üniteli Sabit Sistem (Büyükbaş)



TECHNICAL FEATURES

CHASSIS

Length (cm)	: 33
Width (cm)	: 50
Height (cm)	: 73
Weight (kg)	: 35

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Liner Type	: Long Liner Silicone
Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (DYS - 1 PS)

DKS - 1 PK

FIXED SYSTEM & SINGLE MILK BUCKET UNIT

Tek Gügüm Üniteli Sabit Sistem (Büyükbaş)



TECHNICAL FEATURES

CHASSIS

Length (cm)	: 33
Width (cm)	: 50
Height (cm)	: 73
Weight (kg)	: 35

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Liner Type	: Long Liner Rubber
Bucket Type	: S/S
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYS - 1 PK)
-----------	-------------------------



DREAM

LIL

DR

D

DKS - 1 AS

FIXED SYSTEM & SINGLE MILK BUCKET UNIT

Tek Güğüm Üniteli Sabit Sistem (Büyükbaş)



TECHNICAL FEATURES

CHASSIS

Length (cm)	: 33
Width (cm)	: 50
Height (cm)	: 73
Weight (kg)	: 35

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Liner Type	: Long Liner Silicone
Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type : Oil Pump (DYS - 1 AS)

DKS - 1 AK

FIXED SYSTEM & SINGLE MILK BUCKET UNIT

Tek Gügüm Üniteli Sabit Sistem (Büyükbaş)



TECHNICAL FEATURES

CHASSIS

Length (cm)	: 33
Width (cm)	: 50
Height (cm)	: 73
Weight (kg)	: 35

VACUUM PUMP

Engine Power (kW)	: 0,55 kW
Rotating (rpm)	: 1450 rpm
Voltage (V)	: 220 V
Flow Rate (L/min)	: 180-200
Palette Type	: Graphite
Palette Size (mm)	: 80 x 43 x 4.9
Tank Capacity (L)	: 18

MILKING GROUP

Liner Type	: Long Liner Rubber
Bucket Type	: Aluminum
Bucket Volume	: 30 Lt.
Cluster Weight (gr)	: 2250 Gr.
Milk Claw Capacity	: 240 cc
Milk Hose	: 225mm (25mm x 16mm)
Pulse Hose	: 200mm (14mm x 7mm)

OPTIONAL FEATURES

Pump Type	: Oil Pump (DYS - 1 AK)
-----------	-------------------------



D
R
E
M

H

A

N

3576

FODDER CRUSHING MACHINE*Yem Kırma Makinası (4HP)*

4HP 3Kw
3000 Rpm
220 Volt



3576-1

FODDER CRUSHING MACHINE*Yem Kırma Makinası (4HP)*

4HP 3Kw
3000 Rpm
380 Volt

WHEAT	500-600	kg/Hour
BARLEY	450-550	kg/Hour
CORN	600-700	kg/Hour

3582

SHREDDER MACHINE*Sap Saman Kırma Makinası (4HP)*

4HP 3Kw
3000 Rpm
220 Volt

3577

SWINGING COW BRUSH MACHINE

Kaşima Fırçası



TWO SIDE ROTATION

3584

DOUGH KNEADING MACHINE

Hamur Karma Makinası



Capacity 35 Kg



3579

CHURNING MACHINE 40 LT/HOUR (ELECTRICAL)

Yayık Makinası



Patented design %11 more butter



Ref.	Capacity/Lt	Size/mm	Weight/Kg	Motor
3579-1	25	400 x 400 x 550	8,35	~230 Vac 260 Watt 50-60 Hz
3579	40	370 x 370 x 670	9,00	~230 Vac 260 Watt 50-60 Hz
3579-4	55	420 x 420 x 710	10,00	~230 Vac 260 Watt 50-60 Hz

PUHU ELECTRIC FENCE SYSTEMS COMPACT / Puhu Elektrikli Çit Cihazı Compact**2 Joule**Up to 20 km
12 V DC
12 Ah

NEW PRODUCT



Ref	Solar Panel
3875	10 W
3975	20 W

**MADE IN
melasty®**

3875-2**PUHU ELECTRIC FENCE SYSTEMS SET***Puhu Elektrikli Çit Cihazı Seti***2 Joule**

Up to 20 km

12 V DC

7 Ah

10 W

**MADE IN
melasty®****3875-3****PUHU ELECTRIC FENCE SYSTEMS SET***Puhu Elektrikli Çit Cihazı Seti***4 Joule**

Up to 40 km

12 V DC

7 Ah

10 W

3873**PUHU ELECTRIC FENCE SYSTEMS***Puhu Elektrikli Çit Cihazı***2 Joule**

Up to 20 km

220 V AC

12 V DC

**3873-1****PUHU ELECTRIC FENCE SYSTEMS***Puhu Elektrikli Çit Cihazı***4 Joule**

Up to 40 km

220 V AC

12 V DC

3875-4**PUHU ELECTRIC FENCE BATTERY****+ SOLAR PANEL***Puhu Elektrikli Çit Cihazı Aküsü*

+ Güneş Paneli

12 Volt DC

7 Ah

10 HR

Solar Panel: 10 W

**7044-1****INSULATOR (GALVANIZED)***İzolatör***3875-9****INSULATOR SPINNER***İzolatör Sıkma Aparatı***3581-4****GATE INSULATOR KIT***Kapı Seti İzolatörü***3875-8****LIGHTNING DIVERTER***Yıldırımsavar***FENCE WIRES***Çit İpleri***3548****3549****3580**

500 Mt.



250 Mt.




200 Mt.

	MATERIAL	MT.
3548	POLIETILEN + 3 X 0,16 mm INOX (15,0 Ω/m)	500
3549	POLIETILEN + 3 X 0,16 mm INOX (15,0 Ω/m)	250
3580	7 X 1,5 mm GALVANIZED	200

3111

LONG LINER (IGA)

Uzun Meme Lastiği (IGA)

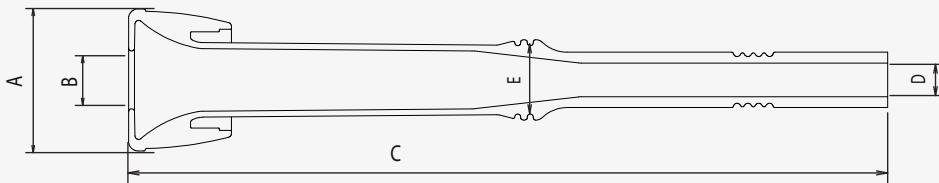

Ref.	A	B	C	D	E	Rubber Kauçuk	Silicone Silikon	Blue Silicone Mavi Silikon
3111	59	24	313	14	28,5	●		
3111-1	59	24	313	14	28,5		●	
3111-2	59	24	313	14	28,5			●

3111-1

SILICONE LONG LINER (IGA)


Uzun Silikon Meme Lastiği (IGA)



3111- 6

LONG LINER (IGA)

Uzun Meme Lastiği (IGA Melasty)

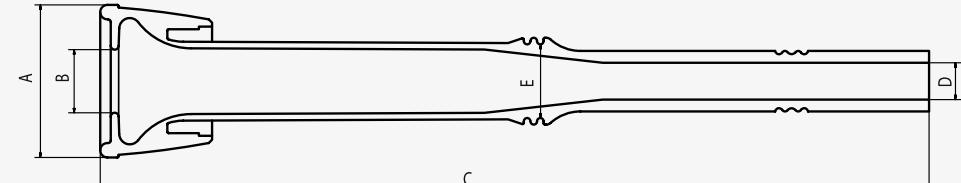

Ref.	A	B	C	D	E	Rubber Kauçuk	Silicone Silikon	Blue Silicone Mavi Silikon
3111-6	59	24	315	14	28,5	●		
3111-7	59	24	315	14	28,5		●	
3111-8	59	24	315	14	28,5			●

3111-7

SILICONE LONG LINER (IGA MELASTY)

Uzun Silikon Meme Lastiği (IGA Melasty)



MILKING CLAW (COMPLETE) 240CC
240cc- Komple Melasty Pençe



W: 565 gr.

Ref.	Gasket Colors	
	Red	Blue
7050	○	
7050-2		○

Gasket Colors	Ref.
Red	Blue
○	7050-1
	7050-3

MILKING CLAW (COMPLETE) 240CC
240cc- Komple Melasty Pençe
(K.A.Çıkıcı Askılı)



UPPER BODY OF CLAW 240CC
240cc – Melasty Oval Pençe Altı (Gövde)



Ref.	Gasket Colors	
	Red	Blue
7054-11	○	
7054-12		○

UPPER BODY OF CLAW 240CC
240cc – Melasty Oval Pençe Altı (Gövde)



Ref.	Gasket Colors	
	Red	Blue
7054-13	○	
7054-14		○

7054

UPPER OF CLAW 240 CC
Melasty Pençe Altı



Ref.	Gasket Colors	
	Red	Blue
7054-1	○	
7054-2		○

CLAW BOTTOM BOWL (COMPLETE) 240CC
240cc - Melasty Pençe Kapağı (Komple)

Ref.	Gasket Colors	
	Red	Blue
3521	○	
3521-1		○



3522 CLAW BOTTOM BOWL (TRANSPARENT) 240CC
240cc - Melasty Pençe Kapağı (Şeffaf)



3529

MILK CLAW MOLDER 240CC
240cc - Oval Pençe Askısı



3536

MILK CLAW MOLDER 240CC
240cc - Oval Pençe Çıkarıcı Askısı



3531

MILK CLAW NUT 240CC
240cc - Oval Pençe Kapak Somunu



3530

MILK CLAW LOWER PORT GASKET 240CC
240cc - Oval Pençe Kapağı Alt Contası



MILKING CLAW (COMPLETE) 340CC

340cc- Komple Melasty Pençe
(K.A. Düz Askılı)



W: 575 gr.

Ref.	Gasket Colors	
	Red	Blue
7100	○	
7100-2		○

MILKING CLAW (COMPLETE) 340CC

340cc- Komple Melasty Pençe
(K.A. Çıkarıcı Askılı)



Ref.	Gasket Colors	
	Red	Blue
7100-1	○	
7100-3		○

UPPER BODY OF CLAW 340CC

340cc – Melasty Oval Pençe Altı (Gövde)



Ref.	Gasket Colors	
	Red	Blue
7054-15	○	
7054-16		○

UPPER BODY OF CLAW 340CC

340cc – Melasty Oval Pençe Altı (Gövde)



Ref.	Gasket Colors	
	Red	Blue
7054-17	○	
7054-18		○

3703

MILK CLAW MOLDER 340CC
340cc - Oval Pençe Askısı



3703-1

MILK CLAW MOLDER 340CC
340cc - Oval Pençe Çıkarıcı Askısı



3524

AIR DISTRIBUTOR OF CLAW 240-340 CC
240-340 cc - Nabız Taksimatı



Ref.	Gasket Colors	
	Red	Blue
3701	○	
3701-1		○

3702

CLAW BOTTOM BOWL (COMPLETE) 340CC
340cc - Melasty Pençe Kapağı (Komple)



CLAW BOTTOM BOWL (TRANSPARENT) 340CC
340cc - Melasty Pençe Kapağı (Şeffaf)



Ref.	Gasket Colors	
	Red	Blue
3528	○	
3528-1		○

CLAW GASKET 240CC
240cc - Melasty Pençe Contası



3525

SHUT OFF VALVE (SET) 240-340 CC
240-340 cc - Oval Pençe Takozu Takımı



3527

SHUT OFF VALVE 240-340 CC
240-340 cc - Oval Pençe Takozu



3526

SHUT OFF VALVE GASKET 240-340 CC
240-340 cc - Oval Pençe Kelebeği



7004

TEATCUP SHELL (HALF - TYPE)


Paslanmaz Meme Lastiği Kılıfı (Yarım Tip)

	Ø A	Ø B	L	W
7004	45 mm	41 mm	124 mm	222 Gr.
7019	45 mm	39 mm	124 mm	245 Gr.
3238	45 mm	42 mm	124 mm	185 Gr.



3315

END OF TEATCUP SHELL WITH 2 O-RING
Meme Lastiği Kılıfı Şeffaf Plastik (2 O-ring)



3360

O Ring (33X2,62)

VACUUM DISTRIBUTOR
Melasty Vakum Distribütörü

7005



7022

MELASTY CABLE BRACKET
Melasty Kablo Askısı



3645

BUCKET PAD
Gügüm Altlığı



3679

MILK STOPPER
Melasty Süt Stop



7014

NON- RETURN VALVE (SET) (1")
Check Valf Seti (1")

7011

PIPE OF NON-RETURN VALVE
Check Valf Borusu (1")



7013

BALL OF NON-RETURN VALVE Ø17
Check Valf Bilyası Ø17



7012

WASHER OF NON-RETURN VALVE
Check Valf Pulu



7006

¾ BUTTERFLY HANDLE BALL VALVES
¾ Kelebek Küresel Vana



7007

¾ 20MM HOSE FITTINGS
¾ 20mm Erkek Hortum Rekoru



3202

SHORT VACUUM TUBE
Kısa Hava Hortumu



7003

TUBE CLIP
Melasty Hortum Kelepçesi



7020

VACUUM TANK HOSE (SHORT)

Vakum Tank Hortumu (Kısa)



7021

VACUUM TANK HOSE (LONG)

Vakum Tank Hortumu (Uzun)



CASTING VACUUM PUMPS

Döküm Vakum Pompaları

CODE	TYPE
3551	CASTING VACUUM PUMP (70 mm - Dry)
3552	CASTING VACUUM PUMP (70 mm - Oil)
3561	CASTING VACUUM PUMP (80 mm - Dry)
3562	CASTING VACUUM PUMP (80 mm - Oil)
3563	CASTING VACUUM PUMP (85 mm - Dry)
3564	CASTING VACUUM PUMP (85 mm - Oil)



GRAPHITE



FIBER

GRAPHITE VANES	SIZE (mm)	FIBER VANES
3227	B(4.90 x 43 x 70)	3417
7015	M(4.90 x 43 x 80)	7016

7008

VACUUM TANK DRY (18 L.)

Vakum Tankı (Kuru - 18 L.)



7009

GALVANIZED VACUUM TANK DRY (18 L.)

Galvaniz Vakum Tankı (Kuru - 18 L.)



7010

VACUUM TANK OIL (18 L.)

Vakum Tankı (Yağlı - 18 L.)



7010-1

GALVANIZED VACUUM TANK OIL (18 L.)

Galvaniz Vakum Tankı (Yağlı - 18 L.)

